

# INSTRUCTION SHEET

## QUICKCAR BATTERY SWITCHES W/ REMOVABLE KEY



These disconnect the battery from the electrical components in the car creating a safer environment to work in the car. QuickCar battery switches can be used to break the positive or negative current on 12V-16V systems.




### INSTALLATION INSTRUCTIONS

1. Locate the desired location in the vehicle to mount the battery switch.
2. Drill a 3/4" hole in that location.
3. Remove the plate supplied from the switch.
4. The switch will go through the back side of the drilled hole with the keyway facing toward the QuickCar logo on the plate.
5. Reinstall plate to the switch using the nuts/star washer provided.
6. Simply rivet the 4 corners of the plate at desired location to complete. Ensure that the black boot is installed on the handle.

### WIRING INSTRUCTIONS

Note: There are 3 studs on the back of the battery switch. All of them are connected to each other when the switch is "ON" and all 3 disconnect from each other when on the "OFF" position.

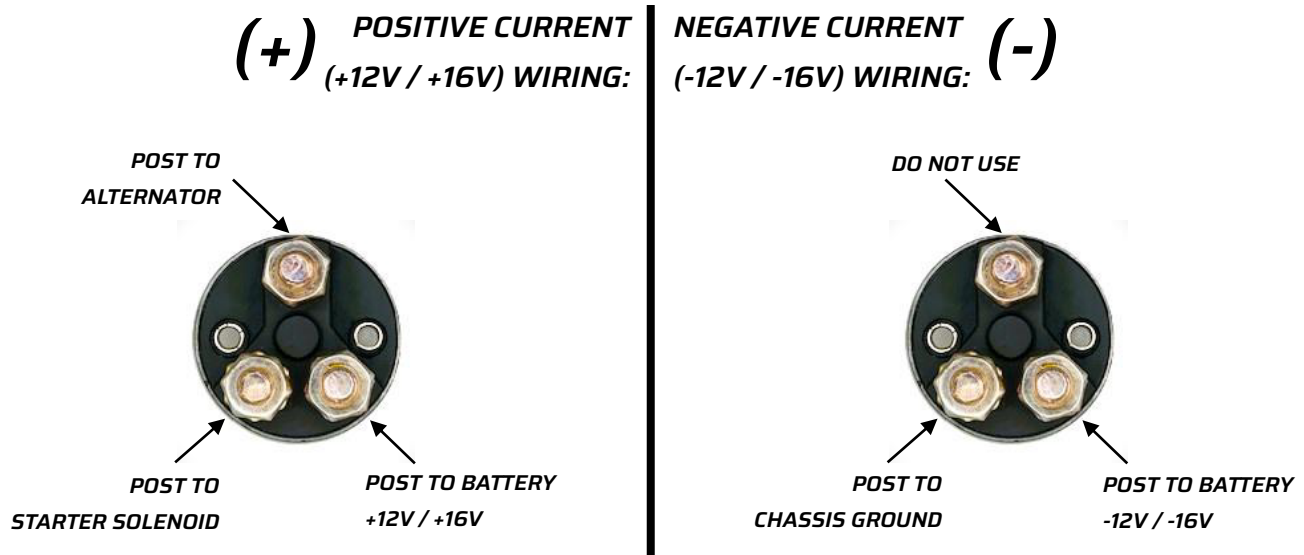

REV.10-24

**⚠ WARNING:** This product can expose you chemicals including lead, which is/are known to the state of California to cause cancer, birth defects or other reproductive harm. For more information, go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



www.quickcar.com  
1-800-997-7333

170 Business Park Dr,  
Lebanon, TN 37090